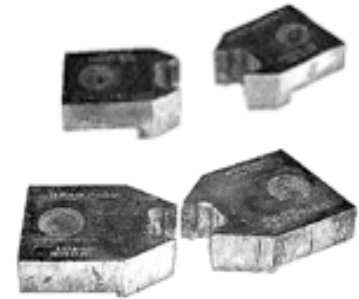



DADOS AJUSTABLES A.C. PARA TUBO
 C.S. ADJUSTABLE PIPE DIES

| CODIGO LWSA | PARA No.2-A | | HILOS POR PULGADA | CODIGO LWSA | PARA No.3-A | | HILOS POR PULGADA |
|-------------|-------------|------------|-------------------|-------------|-------------|------------|-------------------|
| | PULGADAS | MILIMETROS | | | PULGADAS | MILIMETROS | |
| 22163-7 | 1/8 | 3.1 | 27 | 22169-6 | 1/2 | 12.7 | 14 |
| 22164-5 | 1/4 | 6.3 | 18 | 22170-0 | 3/4 | 19.0 | 14 |
| 22165-3 | 3/8 | 9.5 | 18 | 22171-8 | 1 | 25.4 | 11 1/2 |
| 22166-1 | 1/2 | 12.7 | 14 | 22172-6 | 1 1/4 | 31.7 | 11 1/2 |
| 22167-0 | 3/4 | 19.0 | 14 | 22173-4 | 1 1/2 | 38.1 | 11 1/2 |
| 22168-8 | 1 | 25.4 | 11 1/2 | 22174-2 | 2 | 50.8 | 11 1/2 |

LAS MEDIDAS EN MILIMETROS SON APROXIMADAS


DADOS A.C. PARA TUBO
 C.S. SOLID SQUARE PIPE DIES

| CODIGO LWSA | CUADRO | | MEDIDA | | HILOS POR PULGADA |
|-------------|----------|------------|----------|------------|-------------------|
| | PULGADAS | MILIMETROS | PULGADAS | MILIMETROS | |
| 22208-2 | 2 | 50.8 | 1/8 | 3.1 | 27 |
| 22209-1 | 2 | 50.8 | 1/4 | 6.3 | 18 |
| 22210-4 | 2 | 50.8 | 3/8 | 9.5 | 18 |
| 22211-2 | 2 | 50.8 | 1/2 | 12.7 | 14 |
| 22212-1 | 2 | 50.8 | 3/4 | 19.0 | 14 |
| 22213-9 | 2 | 50.8 | 1 | 25.4 | 11 1/2 |

LAS MEDIDAS EN MILIMETROS SON APROXIMADAS


DADOS A.C. PARA TORNILLO, ROSCA ESTANDAR
 C.S. SOLID SQUARE BOLT DIES


| CODIGO LWSA | CUADRO | | MEDIDA | | HILOS POR PULGADA |
|-------------|----------|------------|----------|------------|-------------------|
| | PULGADAS | MILIMETROS | PULGADAS | MILIMETROS | |
| 28898-2 | 2 | 50.8 | 1/4 | 6.3 | 20 |
| 22177-2 | 2 | 50.8 | 5/16 | 7.9 | 18 |
| 22178-1 | 2 | 50.8 | 3/8 | 9.5 | 16 |
| 22179-9 | 2 | 50.8 | 7/16 | 11.1 | 14 |
| 22180-2 | 2 | 50.8 | 1/2 | 12.7 | 13 |
| 22182-9 | 2 | 50.8 | 5/8 | 15.8 | 11 |
| 27636-4 | 2 | 50.8 | 3/4 | 19.0 | 10 |
| 22185-3 | 2 | 50.8 | 7/8 | 22.2 | 9 |
| 22187-0 | 2 | 50.8 | 1 | 25.4 | 8 |
| 22181-1 | 2 1/2 | 63.5 | 1/2 | 12.7 | 13 |
| 22184-5 | 2 1/2 | 63.5 | 3/4 | 19.0 | 10 |
| 22189-6 | 2 1/2 | 63.5 | 1 1/8 | 28.5 | 7 |

LAS MEDIDAS EN MILIMETROS SON APROXIMADAS

DADOS A.C. NUMERICOS PARA TORNILLO
 C.S. ROUND ADJUSTABLE DIES, RIGHT HAND


| CODIGO LWSA | DIAMETRO | | NUMERO | HILOS POR PULGADA | |
|-------------|----------|------------|--------|-------------------|----------|
| | PULGADAS | MILIMETROS | | FINA | ESTANDAR |
| 28154-7 | 13/16 | 20.6 | 5 | -- | 40 |
| 70215-3 | 13/16 | 20.6 | 6 | 40 | -- |
| 28156-3 | 13/16 | 20.6 | 6 | -- | 32 |
| 70216-8 | 13/16 | 20.6 | 8 | 36 | -- |
| 29932-1 | 13/16 | 20.6 | 8 | -- | 32 |
| 28171-9 | 13/16 | 20.6 | 10 | 32 | -- |
| 28153-9 | 13/16 | 20.6 | 10 | -- | 24 |
| 29273-1 | 13/16 | 20.6 | 12 | -- | 24 |

LAS MEDIDAS EN MILIMETROS SON APROXIMADAS